



## Key Feature


- COB flex strip, no lighting spot
- Narrow PCB width 4mm
- CRI>90, 112LM/W@4000K
- 4 optional 2700K/3000K/4000K/6500K

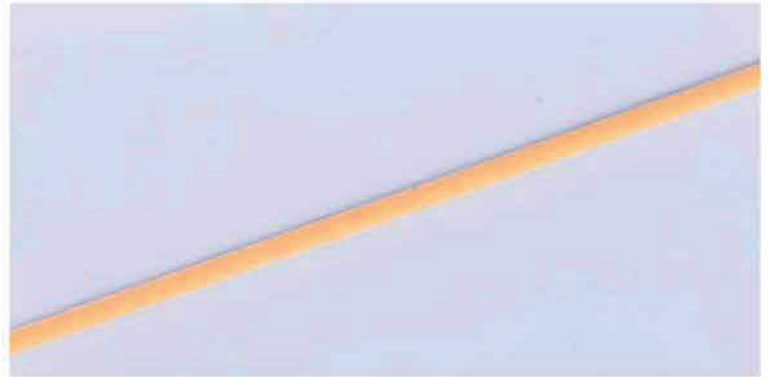

## Drawing

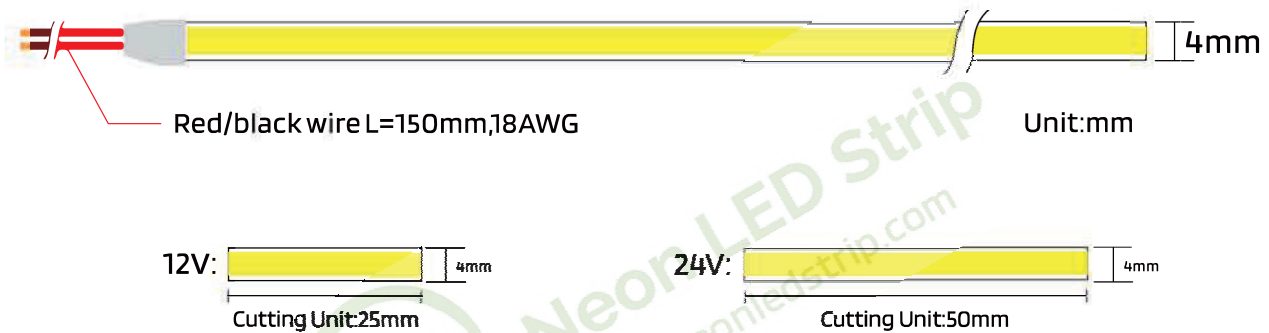

## Waterproof Rate

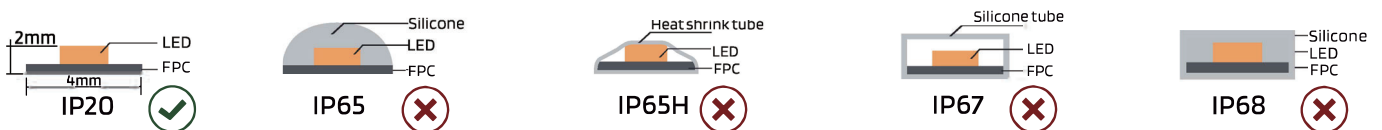

## Basic Parameters

Dimension	5000mm × 4mm × 2mm
Chips/m	480Chips
Power/m	5W
CRI	90+

Cutting Unit	25mm(12V) 50mm(24V)
Input Current /m	0.42A(12V) 0.21A(24V)
Input Voltage	12VDC /24VDC
Ambient Temperature	-20°C ~+50°C

## Photo-electric Parameters

CCT(K)	WATTAGE (W/M)	CRI	R9	Lumen (LM/M)	Effcacy (LM/W)
● 2700K	5W/M	90+	61	485LM/M	87LM/W
● 3000K	5W/M	90+	63	517LM/M	103LM/W
● 4000K	5W/M	90+	65	560LM/M	112LM/W
● 6500K	5W/M	90+	67	573LM/M	114LM/W

## Light Distribution Curve (Data base on 1m IP20 6500K CRI>90, Unit:cd)

