



Key Feature


- COB flex strip, no lighting spot
- PCB width 8mm/10mm
- CRI>90, 115LM/W@4000K 5W
- 2700K/3000K/4000K/6500K/R/G/B optional

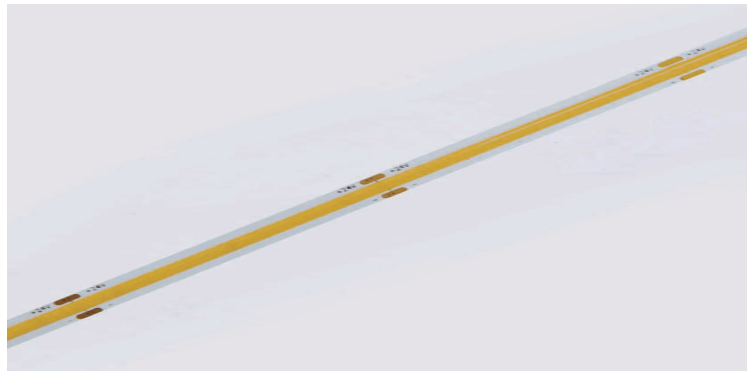

Drawing

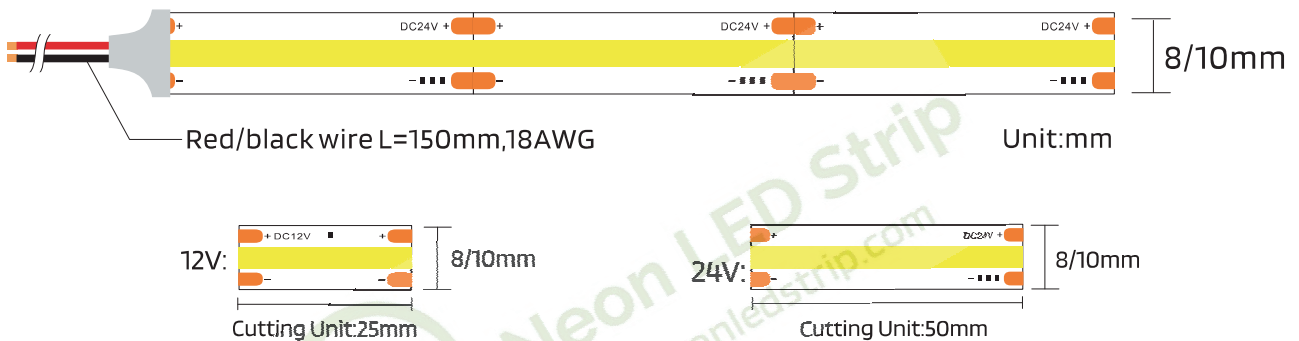

Waterproof Rate

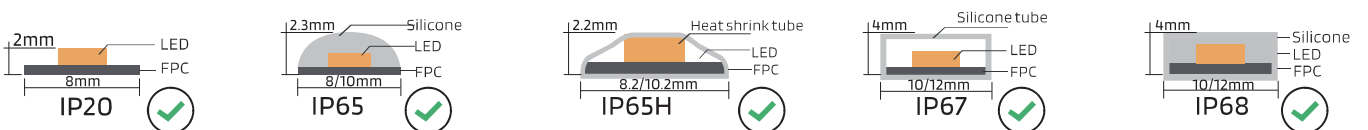

Basic Parameters

Dimension	5000mm × 8(10)mm × 2mm
Chips/m	480Chips
Power/m	5W/10W/15W
CRI	90+

Cutting Unit	25mm(12V) 50mm(24V)
Input Current	0.21A, 0.42A/0.42A, 0.84A/ 0.625A, 1.25A
Input Voltage	12VDC /24VDC
Ambient Temperature	-20 °C ~+50 °C

Photo-electric Parameters

CCT(K)	WATTAGE (W/M)	5W/M		10W/M		15W/M	
		Lumen (LM/M)	Efficacy (LM/W)	Lumen (LM/M)	Efficacy (LM/W)	Lumen (LM/M)	Efficacy (LM/W)
2700K	5/10/15	481	96	958	96	1418	95
3000K	5/10/15	520	103	1028	103	1527	102
4000K	5/10/15	575	115	1139	103	1690	112
6500K	5/10/15	561	113	1125	112	1672	111

Light Distribution Curve

