



Key Feature


- COB flex strip, no lighting spot
- RGBW with 180° beam angle
- RGB+3000K optional
- Very good color reproduction with CRI80+

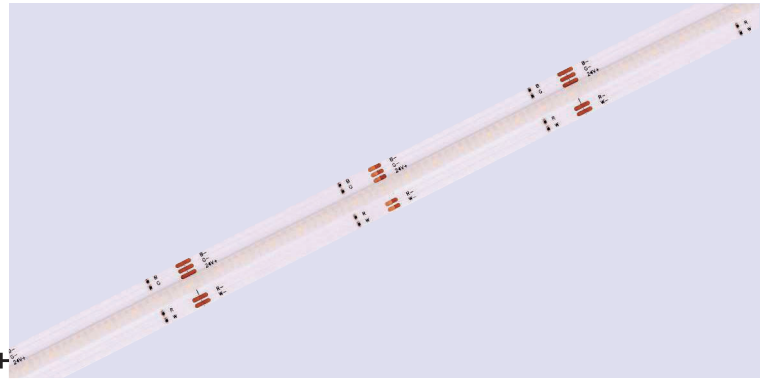

Drawing

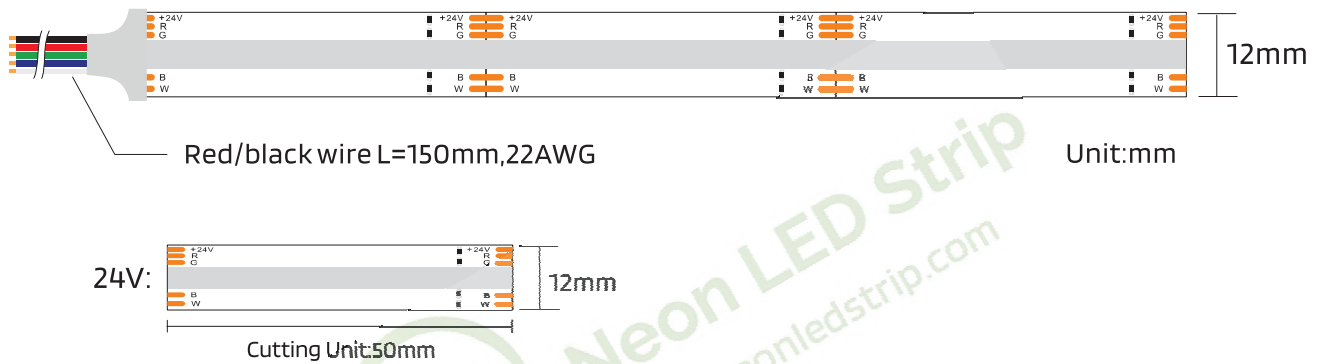

Waterproof Rate

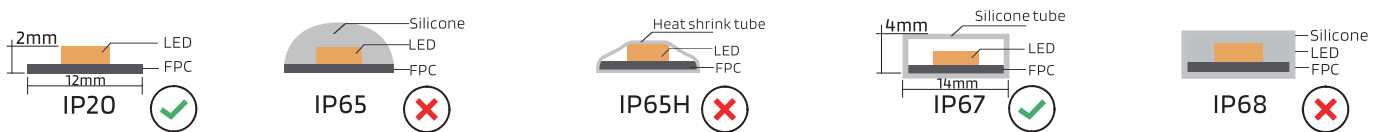






Basic Parameters

Dimension	5000mm × 12mm × 2mm
Chips/m	560Chips
Power/m	16W
CRI	80+

Cutting Unit	50mm(24V)
Input Current/m	/
Input Voltage	24VDC
Ambient Temperature	-20°C ~ +50°C

Photo-electric Parameters

Photo-electric Parameters

CCT(K)	WATTAGE (W/M)	Peak Wavelength(nm)	Dominant Wavelength(nm)	Lumen (LM/M)	Efficacy (LM/W)
 Red	4.07	629	620	137	34
 Green	3.85	518	523	266	70
 Blue	3.91	463	467	77	20
 3000K	3.71	/	/	253	68
 RGB+30K	15.65	/	/	712	45

