


## Key Feature


- COB flex strip, no lighting spot
- Tunable white 2700K+6500K
- CRI>90, 1120LM/M@27K+65K 10W
- 4 optional 2700K/3000K/4000K/6500K



## Drawing

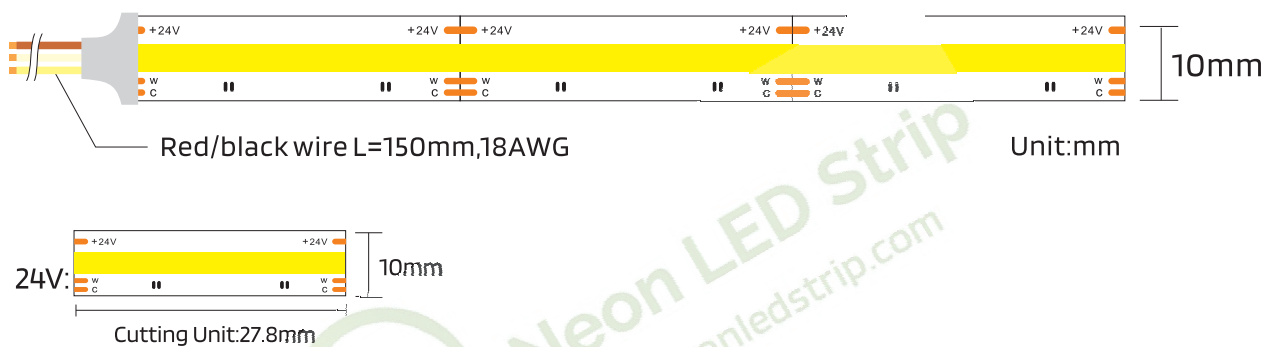

## Waterproof Rate

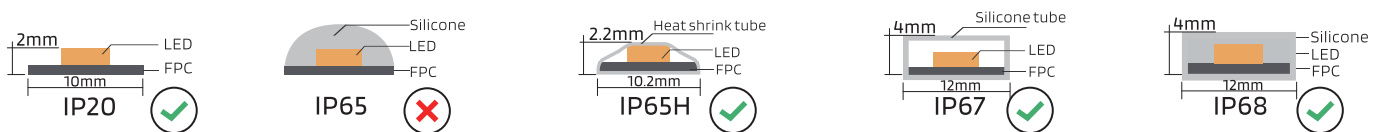




## Basic Parameters

Dimension	5000mm × 10mm × 2mm
Chips/m	576Chips
Power/m	10W/15W
CRI	90+

Cutting Unit	27.8mm(24V)
Input Current/m	0.42A/0.625A
Input Voltage	24VDC
Ambient Temperature	-20 °C ~ +50 °C

## Photo-electric Parameters

CCT(K)	WATTAGE (W/M)	CRI	10W/M Lumen (LM/M)	15W/M Lumen (LM/M)
 2700K	10/15	90+	519	750
 6500K	10/15	90+	615	881
 27K+65K	10/15	90+	1120	1605

## Light Distribution Curve (Data base on 1m IP20 2700K+6500K 15W CRI>90, Unit:cd)

