



Key Feature

- Side View Neon Strip 06mm*12mm only
- IP67 waterproof grade, bending diameter is 200mm
- Uniform light output, no light spots
- With high quality, Soft light effect bringing better indoor and outdoor applications

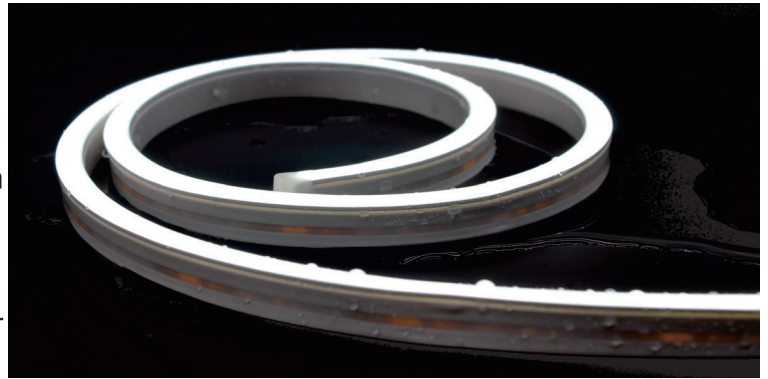

Drawing

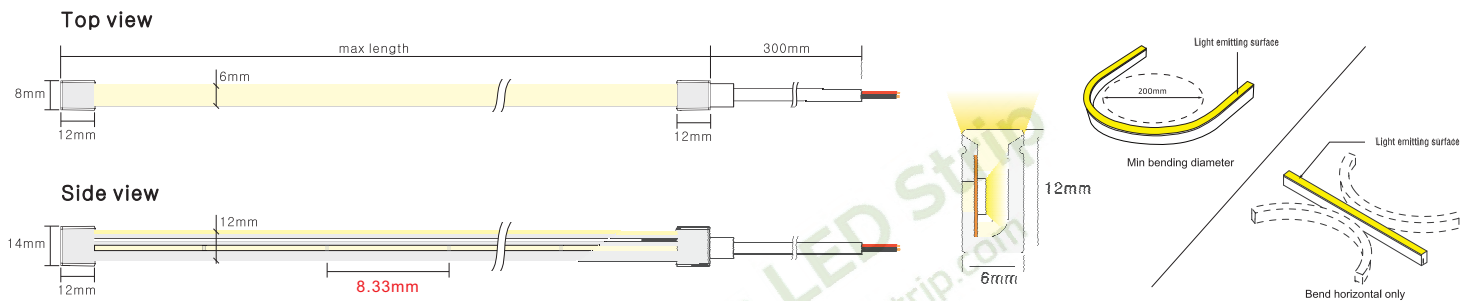

Basic PARAMETERS

Dimension	06mm X 12mm(W*H)	Cutting Unit	50mm(single color)50mm(tunable white) 50mm(RGB)
Power/m	5W/10W	Input Voltage	24VDC
CRI	90+	Ambient Temperature	-20°C~+45°C

Photo-electric Parameters (Single color)

CCT(K)	CCT Range	CRI	5W/M	10W/M
			Lumen (LM/M)	Lumen (LM/M)
2100k	2000-2200	90+	145	246
2400k	2300-2500	90+	172	310
2700K	2600-2800	90+	178	353
3000K	2900-3100	90+	154	299
3500K	3400-3700	90+	169	327
4000K	3800-4300	90+	186	360
5000K	4800-5300	90+	187	360
6000K	5900-6400	90+	190	360

Photo-electric Parameters (tunable color)










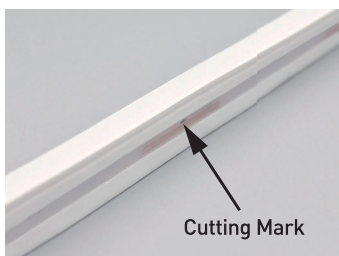
CCT(K)	CCT Range	CRI	5W/M	10W/M
			Lumen (LM/M)	Lumen (LM/M)
 WW	2000-2300	90+	58	125
 W	5600-6300	90+	88	177
 WW+W	3400-3700	90+	158	269

Photo-electric Parameters (RGB)

CCT(K)	Color (NM)	5W/M	10W/M
		Lumen (LM/M)	Lumen (LM/M)
 Red	620-625	82	160
 Green	515-525	240	398
 Blue	460-465	29	51
 Yellow	585-595	61	125
 Pink	Pink	78	145
 RGB	RGB	73	126

Cutting Mark




The bottom of the led strip has transparent window, the black marker is the cutting position

Mounting Way



Aluminium mounting clips
19.7x8x13mm(L x W x H)

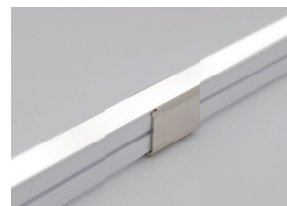

Stainless steel mounting clips
15x7.5x13mm(L x W x H)



Aluminium profile
1000x8x13mm(L x W x H)