



Key Feature

- Side View Neon Strip 06mm*12mm only
- IP67 waterproof grade, bending diameter is 200mm
- Uniform light output, no light spots
- With high quality, Soft light effect bringing better indoor and outdoor applications

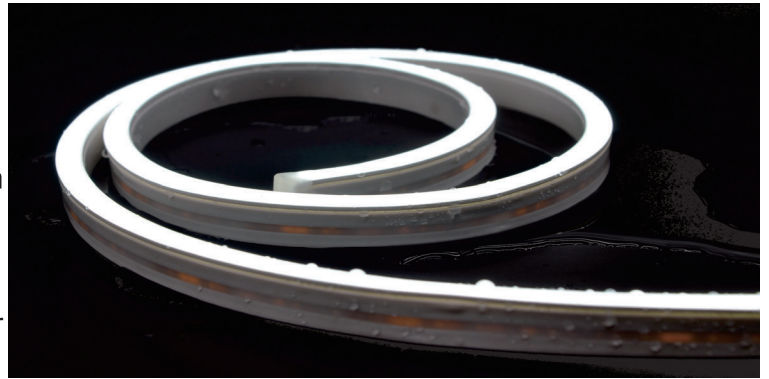

Drawing

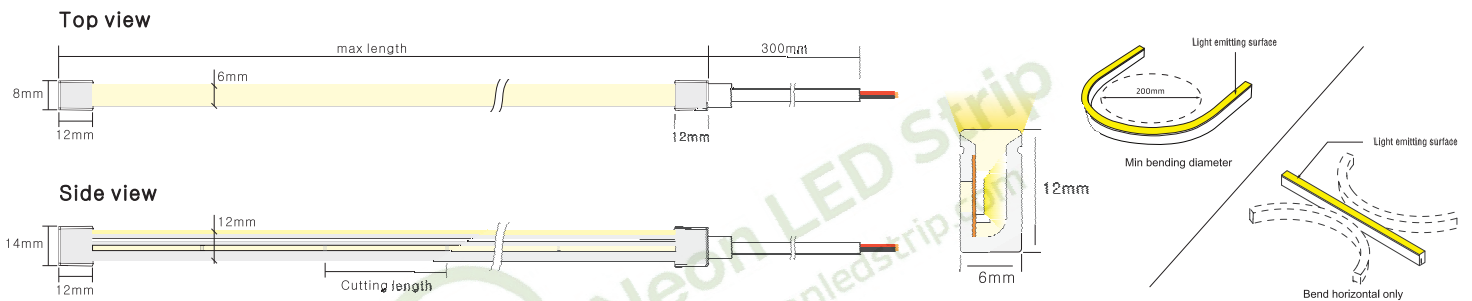

Basic PARAMETERS

Dimension	06mm × 12mm(W*H)	Cutting Unit	50mm(single color)50mm(tunable white) 50mm(RGB)
Power/m	5W/10W	Input Voltage	24VDC
CRI	90+	Ambient Temperature	-20°C~+45°C

Photo-electric Parameters (Single color)

CCT(K)	CCT Range	CRI	5W/M	10W/M
			Lumen (LM/M)	Lumen (LM/M)
2100k	2000-2200	90+	145	246
2400k	2300-2500	90+	172	310
2700K	2600-2800	90+	178	353
3000K	2900-3100	90+	154	299
3500K	3400-3700	90+	169	327
4000K	3800-4300	90+	186	360
5000K	4800-5300	90+	187	360
6000K	5900-6400	90+	190	360

Photo-electric Parameters (tunable color)










CCT(K)	CCT Range	CRI	5W/M	10W/M
			Lumen (LM/M)	Lumen (LM/M)
 WW	2000-2300	90+	58	125
 W	5600-6300	90+	88	177
 WW+W	3400-3700	90+	158	269

Photo-electric Parameters (RGB)

CCT(K)	Color (NM)	5W/M	10W/M
		Lumen (LM/M)	Lumen (LM/M)
 Red	620-625	82	160
 Green	515-525	240	398
 Blue	460-465	29	51
 Yellow	585-595	61	125
 Pink	Pink	78	145
 RGB	RGB	73	126