


## Key Feature

- Side View Neon Strip 08mm\*17mm only
- IP67 waterproof grade, bending diameter is 200mm
- Uniform light output, no light spots
- With high quality, Soft light effect bringing better indoor and outdoor applications



## Drawing

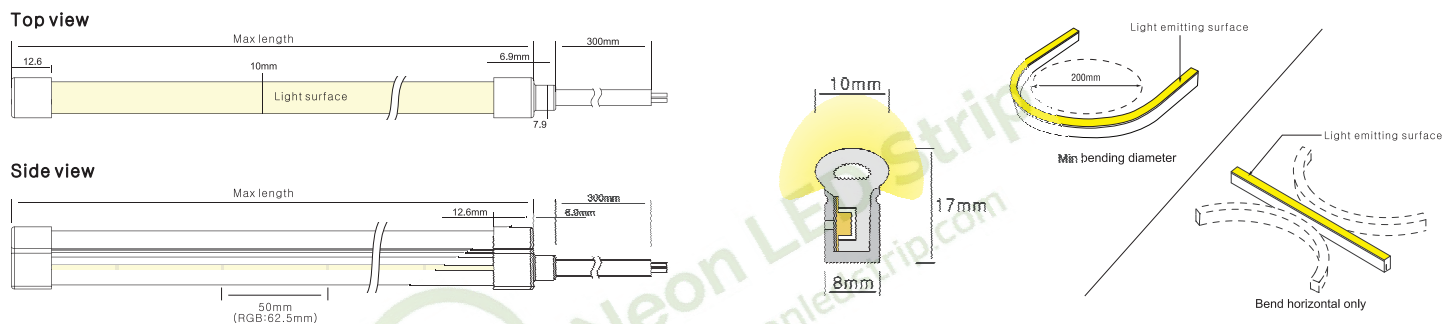




## Basic PARAMETERS

Dimension	08mm X 17mm(W*H)	Cutting Unit	50mm(single color)50mm(tunable white) 62.5mm(RGB)
Power/m	5W/10W	Input Voltage	24VDC
CRI	90+	Ambient Temperature	-20°C~+45°C







## Photo-electric Parameters (Single color)

CCT(K)	CCT Range	CRI	5W/M	10W/M
			Lumen (LM/M)	Lumen (LM/M)
2100K	2000-2200	90+	142	271
2400K	2300-2500	90+	148	285
2700K	2600-2800	90+	159	310
3000K	2900-3100	90+	160	311
3500K	3400-3700	90+	167	323
4000K	3800-4300	90+	174	340
5000K	4800-5300	90+	175	344
6000K	5900-6400	90+	166	319

## Photo-electric Parameters (tunable color)

CCT(K)	CCT Range	CRI	5W/M	10W/M
			Lumen (LM/M)	Lumen (LM/M)
 WW	2000-2300	90+	81	169
 W	5600-6300	90+	82	172
 WW+W	3500-4200	90+	160	331

## Photo-electric Parameters (RGB)

CCT(K)	Color (NM)	5W/M	10W/M
		Lumen (LM/M)	Lumen (LM/M)
 Red	620-625	67	150
 Green	515-525	190	356
 Blue	460-465	38	71
 Yellow	585-595	59	116
 Pink	Pink	74	148
 RGB	RGB	82	144