



Key Feature


- Side View Neon Strip 10mm*23mm Only
- Normal power 5W/10W/15W optional
- IP67 Waterproof grade, Uniform light output
- With high quality, Soft light effect bringing better indoor and outdoor applications

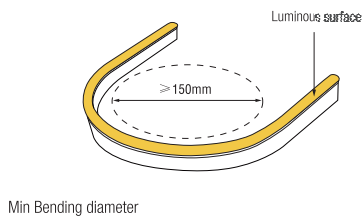

Drawing

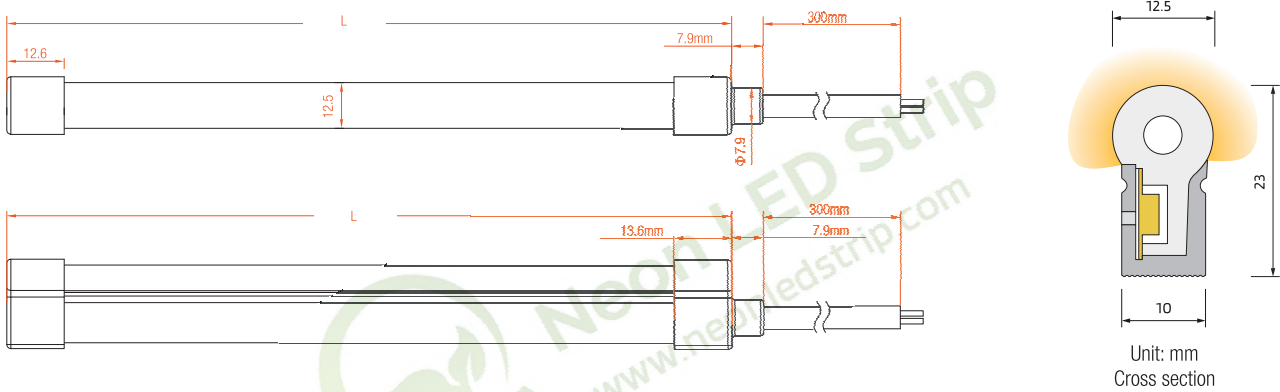

Min Bending diameter

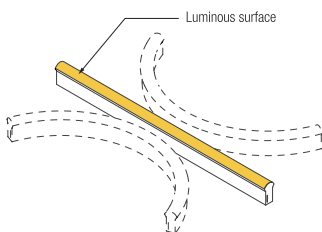

Bend horizontal only

Electrical Parameter

Voltage	DC24V
LED PIN Temperature	Max. 65 C
Storage Temperature	-25 C ~ 60 C
Ambient Temperature	Min. -25°C, Max (Table below)
CRI	> 90

Specification

Power(w/m)	5w/m	10w/m	15w/m
Efficacy(lm/w)@4000K	39.4lm/w	38.7lm/w	36.1lm/w
Max Ambient Temperature	55 C	45 C	35 C

Due to the tolerance of the production and electrical components, output value and electrical power can vary up to 10%.

Single Color(Lm/m)

CCT(K)	CRI	Voltage	Power(W)	Lumen (LM/M)	Efficiency (LM/W)	Unit Length (mm)	Max. Run Length (M)	CC/CV
2100K±100	≥90	DC24V	10	310	31	50	17 (CC)	CC/CV
2400K±100	≥90	DC24V	10	320	32	50	17 (CC)	CC/CV
2700K±100	≥90	DC24V	10	350	35	50	17 (CC)	CC/CV
3000K±100	≥90	DC24V	10	350	35	50	17 (CC)	CC/CV
3500K $\begin{smallmatrix} +200 \\ -100 \end{smallmatrix}$	≥90	DC24V	10	380	38	50	17 (CC)	CC/CV
4000K $\begin{smallmatrix} +300 \\ -200 \end{smallmatrix}$	≥90	DC24V	10	390	39	50	17 (CC)	CC/CV
5000K $\begin{smallmatrix} +300 \\ -200 \end{smallmatrix}$	≥90	DC24V	10	380	38	50	17 (CC)	CC/CV
6000K $\begin{smallmatrix} +400 \\ -100 \end{smallmatrix}$	≥90	DC24V	10	350	35	50	17 (CC)	CC/CV
Red	--	DC24V	10	150	15	50	18 (CC)	CC/CV
Green	--	DC24V	10	405	40.5	50	17 (CC)	CC/CV
Blue	--	DC24V	10	75	7.5	50	17 (CC)	CC/CV
Yellow	--	DC24V	10	125	12.5	50	18 (CC)	CC/CV
Pink	--	DC24V	10	160	16	50	17 (CC)	CC/CV

CCT Tunable(Lm/m)

CCT(K)	CRI	Voltage	Power(W)	Lumen (LM/M)	Efficiency (LM/W)	Unit Length (mm)	Max. Run Length (M)	CC/CV
WW	≥90	DC24V	5	180	36	50	5	CV
W	≥90	DC24V	5	190	38	50	5	CV
W+WW	≥90	DC24V	10	360	36	50	5	CV

RGB(Lm/m)


CCT(K)	CRI	Voltage	Power(W)	Lumen (LM/M)	Efficiency (LM/W)	Unit Length (mm)	Max. Run Length (M)	CC/CV
R	--	DC24V	3.3	33	10	62.5	5	CV
G	--	DC24V	3.3	97.35	29.5	62.5	5	CV
B	--	DC24V	3.3	19.8	6	62.5	5	CV
RGB	--	DC24V	10	145	14.5	62.5	5	CV

Mounting Way


Aluminium mounting clips



Dimension:
20x12.6x15.4mm(L x W x H)
Accessories:
Screw M3x15mm



Aluminium profile

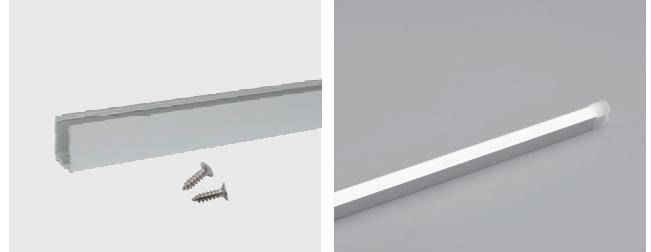

Dimension:
1000(±5)x12.6x15.4mm(L x W x H)
Accessories:
Screw M3x15mm

