



## Key Feature


- Side View Neon Strip 16mm\*15mm Only
- Normal power 5W/10W/15W optional
- IP67 Waterproof grade, Uniform light output
- With high quality, Soft light effect bringing better indoor and outdoor applications

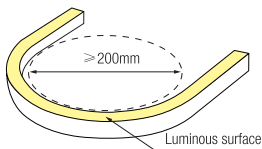

## Drawing

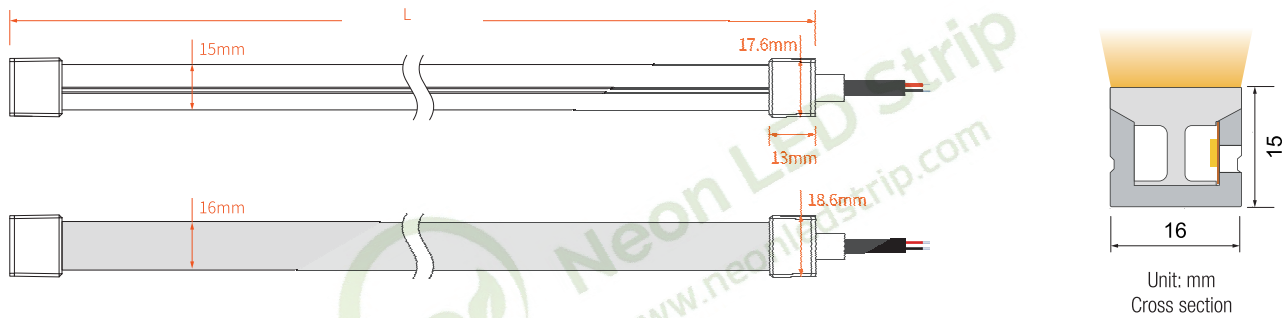

Min bending diameter

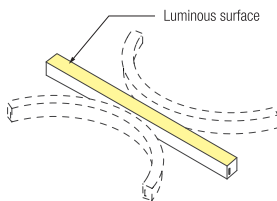

Bend horizontal only

## Electrical Parameter

Voltage	DC24V
LED PIN Temperature	Max. 65°C
Storage Temperature	-25°C~ 60°C
Ambient Temperature	Min. -25°C
CRI	>90

## Specification

Power(w/m)	5 w/m	10 w/m	15 w/m
Efficacy(lm/w)@4000K	76 lm/w	73 lm/w	70 lm/w
Max Ambient Temperature	55°C	45°C	35°C

Due to the tolerance of the production and electrical components, output value and electrical power can vary up to 10%.

## Single Color(Lm/m)

CCT(K)	CRI	Voltage	Power(W)	Lumen (LM/M)	Efficiency (LM/W)	Unit Length (mm)	Max. Run Length (M)	CC/CV
2100K±100	≥90	DC24V	10	460	46	50	17(CC)	CC/CV
2400K±100	≥90	DC24V	10	540	54	50	17(CC)	CC/CV
2700K±100	≥90	DC24V	10	660	66	50	17(CC)	CC/CV
3000K±100	≥90	DC24V	10	570	57	50	17(CC)	CC/CV
3500K <sup>+200</sup> / <sub>-100</sub>	≥90	DC24V	10	630	63	50	17(CC)	CC/CV
4000K <sup>+300</sup> / <sub>-200</sub>	≥90	DC24V	10	720	72	50	17(CC)	CC/CV
5000K <sup>+300</sup> / <sub>-200</sub>	≥90	DC24V	10	750	75	50	17(CC)	CC/CV
6000K <sup>+400</sup> / <sub>-100</sub>	≥90	DC24V	10	690	69	50	17(CC)	CC/CV
Red	--	DC24V	10	290	29	50	18(CC)	CC/CV
Green	--	DC24V	10	550	55	50	17(CC)	CC/CV
Blue	--	DC24V	10	130	13	50	17(CC)	CC/CV
Yellow	--	DC24V	10	290	29	50	18(CC)	CC/CV
Pink	--	DC24V	10	470	47	50	17(CC)	CC/CV

## CCT Tunable(Lm/m)

CCT(K)	CRI	Voltage	Power(W)	Lumen (LM/M)	Efficiency (LM/W)	Unit Length (mm)	Max. Run Length (M)	CC/CV
WW	≥90	DC24V	5	330	66	50	5	CV
W	≥90	DC24V	5	345	69	50	5	CV
W+WW	≥90	DC24V	10	670	67	50	5	CV

## RGB(Lm/m)

CCT(K)	CRI	Voltage	Power(W)	Lumen (LM/M)	Efficiency (LM/W)	Unit Length (mm)	Max. Run Length (M)	CC/CV
R	--	DC24V	3.3	75.9	23	62.5	5	CV
G	--	DC24V	3.3	191.4	58	62.5	5	CV
B	--	DC24V	3.3	36.3	11	62.5	5	CV
RGB	--	DC24V	10	310	31	62.5	5	CV