



Key Feature

- Top View Neon Strip 06mm*06mm only
- IP67 waterproof grade, bending diameter is 200mm
- Uniform light output, no light spots
- With high quality, Soft light effect bringing better indoor and outdoor applications

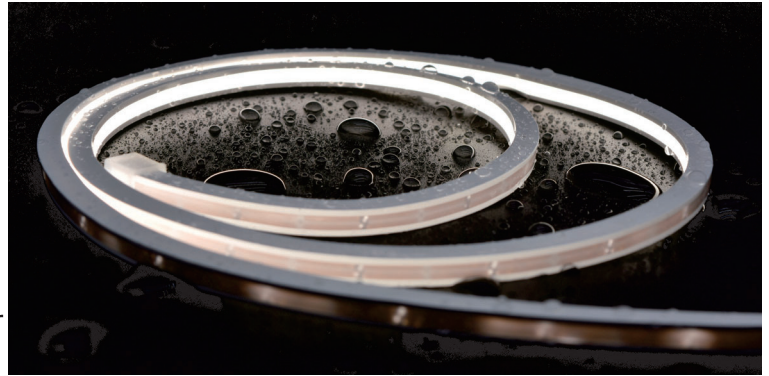

Drawing

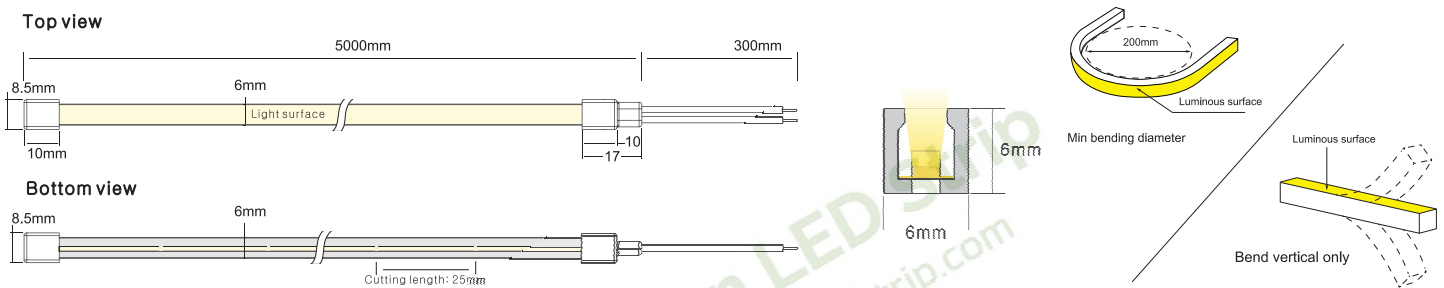

Basic PARAMETERS

Dimension 06mm X 06mm(W*H)

Power/m 6W

CRI 90+

Cutting Unit 25mm


Input Voltage 24VDC

Ambient Temperature -20°C~+45°C

Photo-electric Parameters (Single color)

CCT(K)	CCT Range	CRI	Lumen (LM/M)
1700K	1600-1900	90+	235
2200K	2100-2400	90+	325
2400K	2200-2600	90+	330
2600K	2400-2800	90+	337
2800K	2600-3000	90+	345
3200K	2900-3500	90+	348
3800K	3500-4200	90+	358
4400K	4000-4800	90+	353
5600K	5200-6000	90+	379


Mounting Way

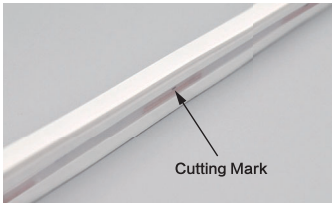

The bottom of the led strip has transparent window,the black marker is the cutting position




Aluminium Mounting Clips
20x9x8mm(L x W x H)

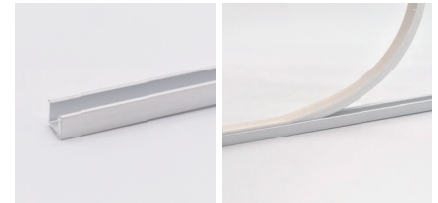

Aluminium profile
1000x9x6mm(L x W x H)

Cable Entry


Silicone end cap



Front Cable Entry




Side Cable Entry



Bottom Cable Entry

Integral plug

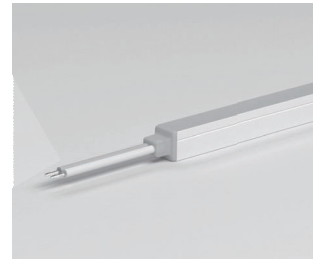

Front Cable Entry