



## Key Feature

- Top View Neon Strip 10mm\*10mm only
- IP67 waterproof grade, bending diameter is 100mm
- Uniform light output, no light spots
- With high quality, Soft light effect bringing better indoor and outdoor applications

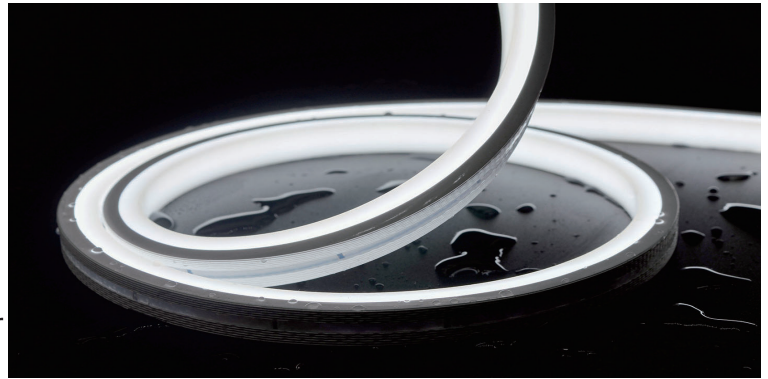

## Drawing

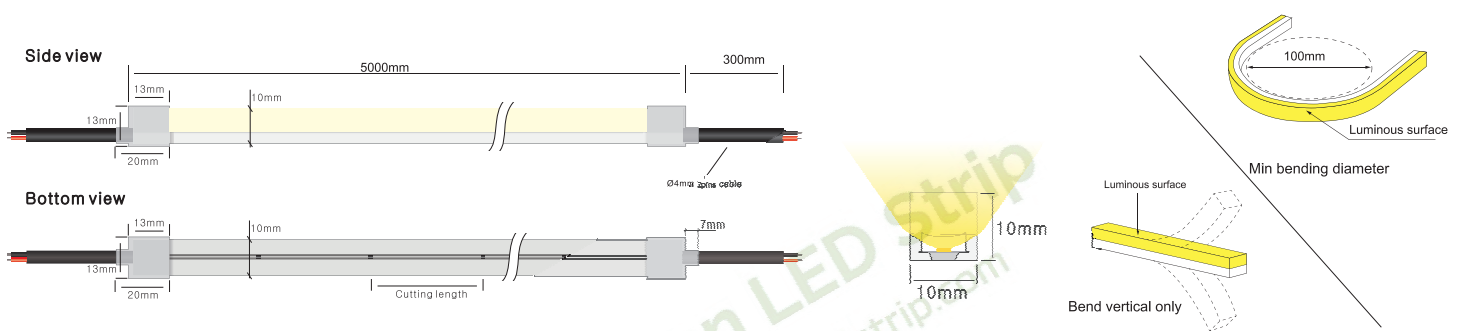

## Basic PARAMETERS

Dimension	10mm X 10mm(W*H)
Power/m	5W/10W
CRI	90+

Cutting Unit	35.7mm
Input Voltage	24VDC
Ambient Temperature	-20°C~+45°C


## Photo-electric Parameters (Single color)

CCT(K)	CCT Range	CRI	5W/M	10W/M
			Lumen (LM/M)	Lumen (LM/M)
2100K	2000-2200	90+	332	644
2400K	2300-2500	90+	354	684
2700K	2600-2800	90+	380	737
3000K	2900-3100	90+	401	785
3500K	3400-3700	90+	371	718
4000K	3800-4300	90+	429	828
5000K	4800-5300	90+	427	827
6000K	5900-6400	90+	419	810


## Photo-electric Parameters<sub>(R/G/B)</sub>

CCT(K)	Color (NM)	5W/M	10W/M
		Lumen (LM/M)	Lumen (LM/M)
● Red	620-625	153	331
● Green	515-525	512	920
● Blue	460-465	93	173
● Yellow	585-595	127	268
● Pink	Pink	179	347


## Cutting Mark

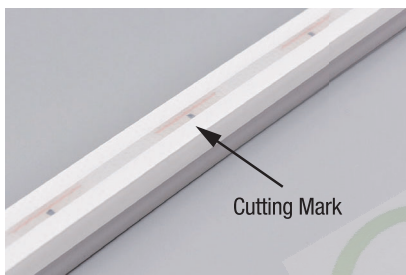

Remark: The bottom of the led strip has transparent window, the black marker is the cutting position

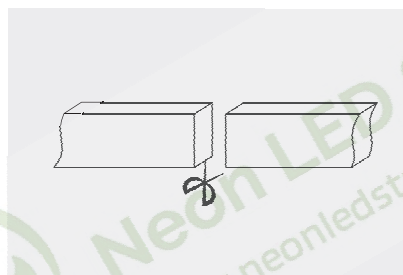


Vertical cutting precisely in the exact cutting position of led strip.





Please don't be free to cut and cut into an oblique angle or cambered section.

## Mounting Way

Stainless Steel Mounting clips

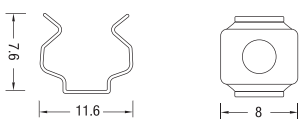

Aluminium Profile

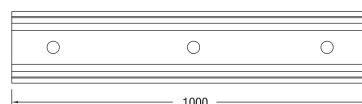

transparent plastic groove

