



## Key Feature

- Top View Neon Strip 12mm\*12mm only
- IP67 waterproof grade, bending diameter is 200mm
- Uniform light output, no light spots
- With high quality, Soft light effect bringing better indoor and outdoor applications

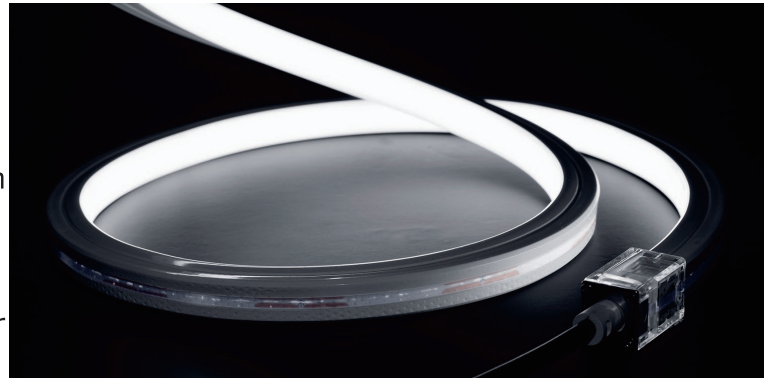

## Drawing

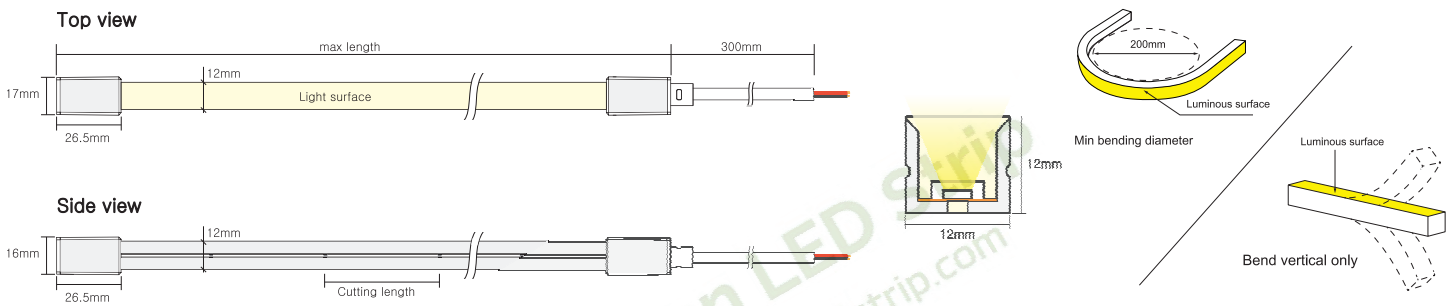




## Basic PARAMETERS

Dimension	12mm X 12mm(W*H)	Cutting Unit	50mm(Single color)50mm(tunable white) 62.5mm(RGB)
Power/m	5W/10W	Input Voltage	24VDC
CRI	90+	Ambient Temperature	-20°C~+45°C







## Photo-electric Parameters (Single color)

CCT(K)	CCT Range	CRI	5W/M	10W/M
			Lumen (LM/M)	Lumen (LM/M)
2100k	2000-2200	90+	289	559
2400k	2300-2500	90+	287	560
2700K	2600-2800	90+	350	670
3000K	2900-3100	90+	329	638
3500K	3400-3700	90+	355	660
4000K	3800-4300	90+	346	677
5000K	4800-5300	90+	345	680
6000K	5900-6400	90+	335	660

## Photo-electric Parameters (tunable color)

CCT(K)	CCT Range	CRI	5W/M	10W/M
			Lumen (LM/M)	Lumen (LM/M)
 WW	2000-2300	90+	123	194
 W	5000-5500	90+	160	320
 WW+W	3400-3700	90+	240	475


## Photo-electric Parameters (RGB)

CCT(K)	Color (NM)	5W/M	10W/M
		Lumen (LM/M)	Lumen (LM/M)
 Red	620-625	130	267
 Green	515-525	374	703
 Blue	460-465	71	129
 Yellow	585-595	28	51
 Pink	Pink	145	279
 RGB	RGB	175	290


## Cable Entry

**Front Cable Entry:**  
The cable could be hidden in all directions by the flexible design.


Integral plug

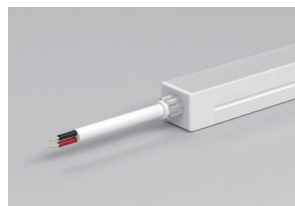


Combined end cap

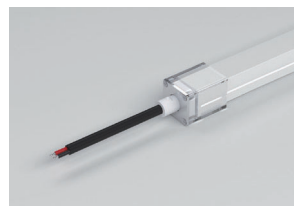

Silicone end cap

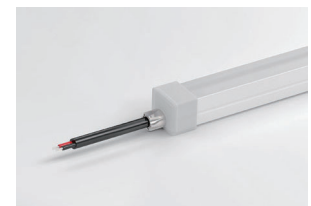

**Side Cable Entry:**  
The cable could be perfectly hidden to achieve seamless light connection.



**Bottom Cable Entry:**  
The cable could be perfectly hidden to achieve seamless light connection.

