



## Key Feature

- Top View Neon Strip 16mm\*15mm only
- IP67 waterproof grade, bending diameter is 200mm
- Uniform light output, no light spots
- With high quality, Soft light effect bringing better indoor and outdoor applications

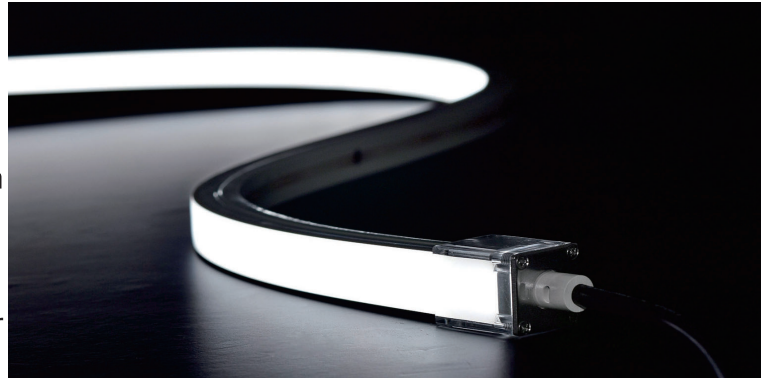

## Drawing

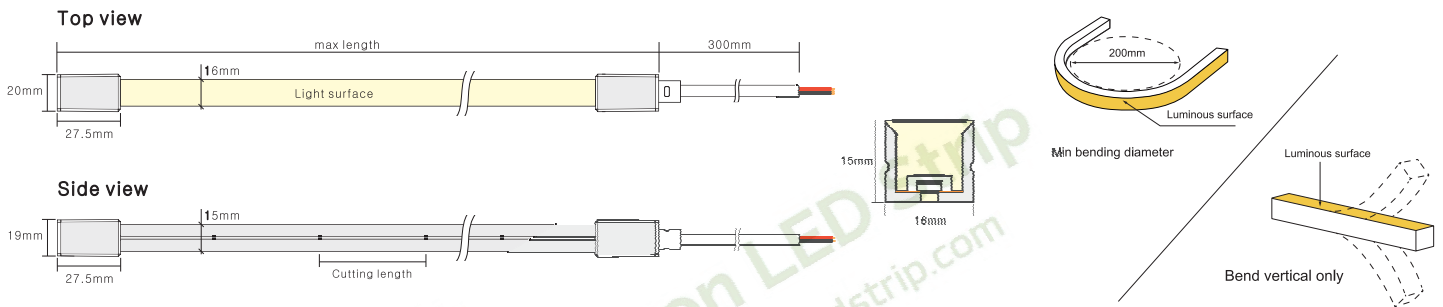




## Basic PARAMETERS

Dimension	16mm × 15mm (W*H)	Cutting Unit	50mm (single color) / 50mm (tunable white) / 62.5mm (RGB) / 62.5mm (RGBW)
Power/m	5W/10W/15W	Input Voltage	24VDC
CRI	90+	Ambient Temperature	-20°C ~ +45°C








## Photo-electric Parameters (Single color)

CCT(K)	CCT Range	CRI	5W/M Lumen (LM/M)	10W/M Lumen (LM/M)	15W/M Lumen (LM/M)
2100k	2000-2200	90+	240	460	627
2400k	2300-2500	90+	242	468	660
2700K	2600-2800	90+	286	553	770
3000K	2900-3100	90+	286	540	767
3500K	3400-3700	90+	300	583	815
4000K	3800-4300	90+	295	573	807
5000K	4800-5300	90+	297	570	794
6000K	5900-6400	90+	293	570	782

## Photo-electric Parameters (tunable color)

CCT(K)	CCT Range	CRI	5W/M	10W/M	15W/M
			Lumen (LM/M)	Lumen (LM/M)	Lumen (LM/M)
 WW	2000-2300	90+	130	275	360
 W	5600-6300	90+	143	295	387
 WW+W	3600-4200	90+	279	569	766

## Photo-electric Parameters (RGB)

CCT(K)	Color (NM)	5W/M	10W/M	15W/M
		Lumen (LM/M)	Lumen (LM/M)	Lumen (LM/M)
 Red	620-625	112	237	320
 Green	515-525	308	549	698
 Blue	460-465	57	107	148
 Yellow	585-595	25	45	61
 Pink	Pink	116	224	302
 RGB	RGB	147	267	325
 RGBW	RGB+27	189	366	496